

LIGHT SOURCE - FUENTE DE LUZ

1xGU10 MAX 8W LED not incl
Lampholder for GU10 incl

TECHNICAL FEATURES - CARACTERÍSTICAS TÉCNICAS




□	Ø 0,2m
□	100V-240V ~50Hz/60Hz



ref. 02100601 white / blanco

ref. 02100602 black / negro


ref. 02100603 gold / oro

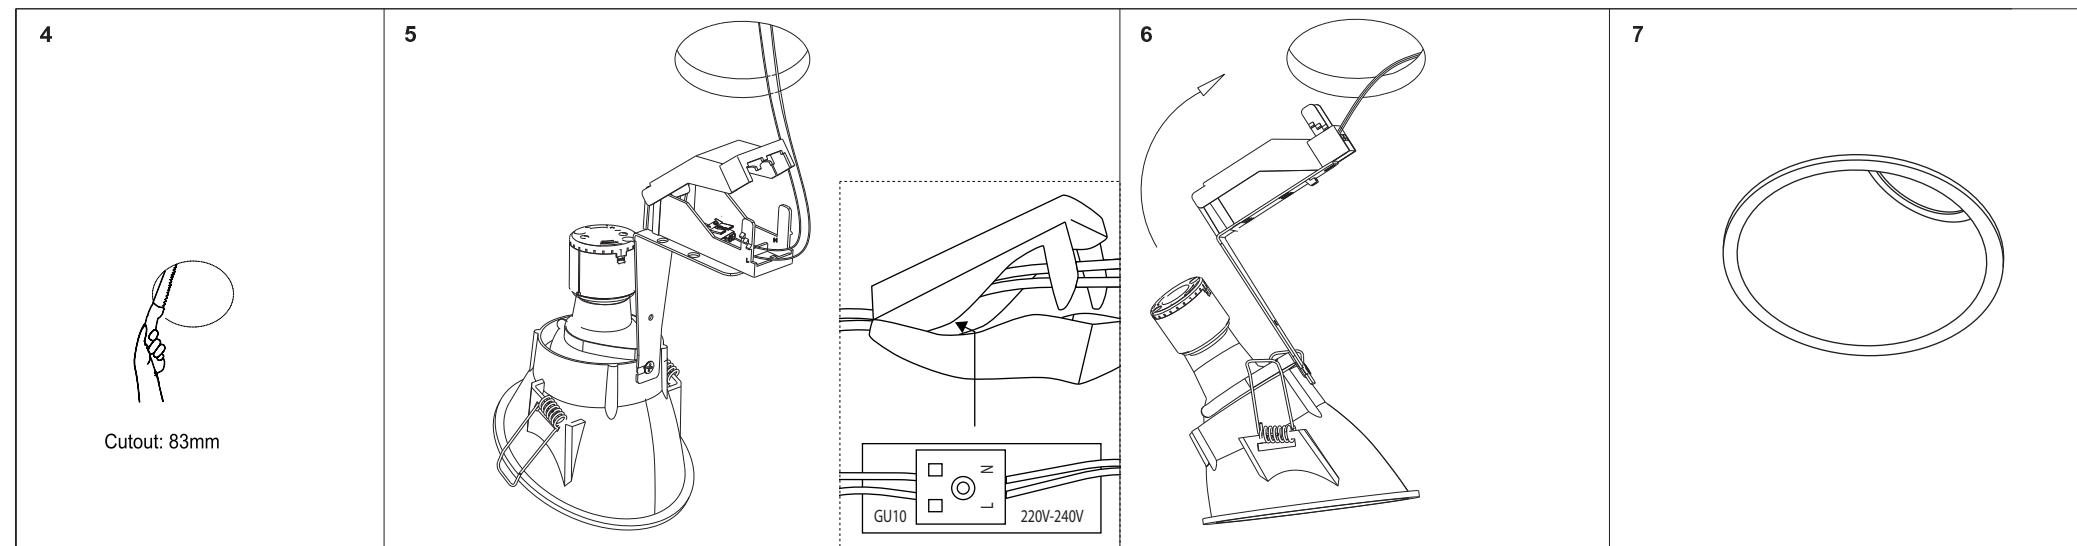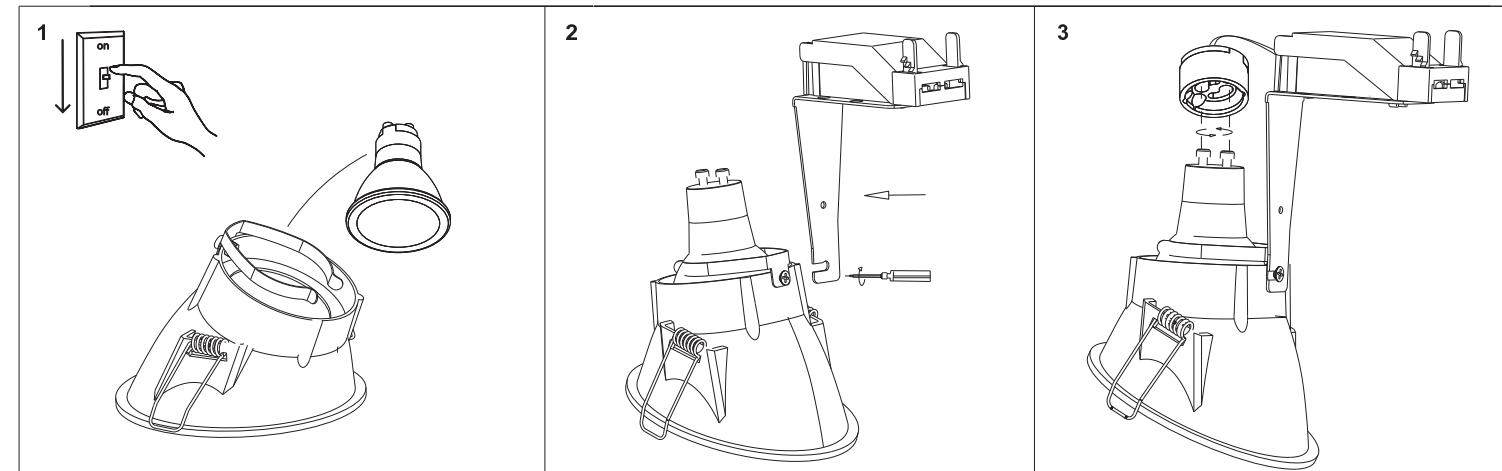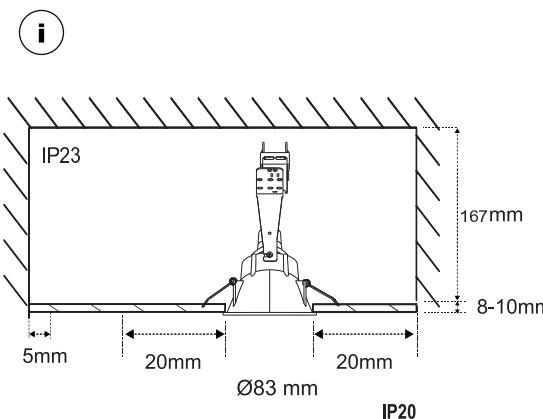

LIGHT SOURCE - FUENTE DE LUZ

1 x GU10 MAX 50W not incl

TECHNICAL FEATURES - CARACTERISTICAS TÉCNICAS




LOREFAR, SL
Dinámica, nº1 • Polígono Industrial Santa Rita • 08755
Castellbisbal • Barcelona • Spain
NAC: Tel. 902 165 166 • EXP: Tel. +34 937 723 965
faro@lorefar.com • www.faro.es

ref. 02200501 WHITE-BLANCO

ref. 02200502 BLACK-NEGRO

ref. 02200503 GOLD - ORO

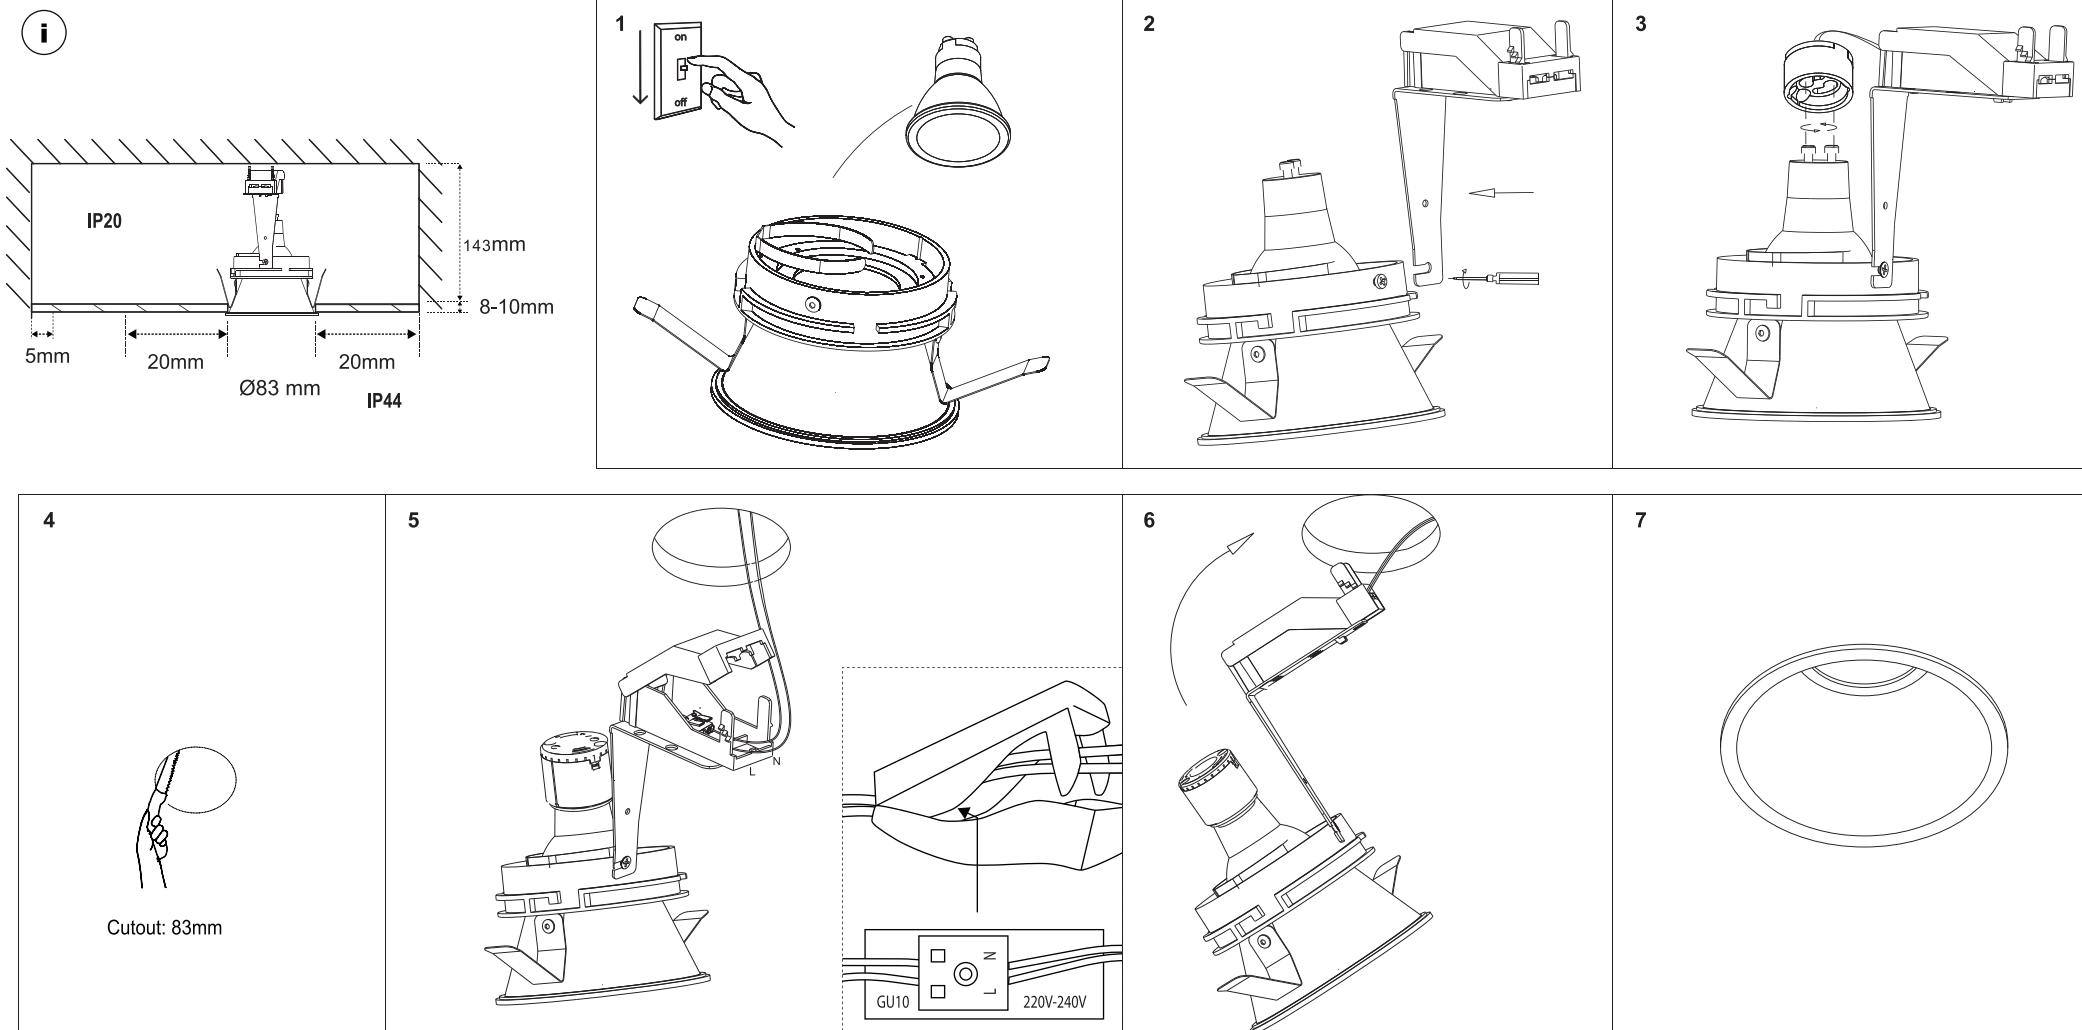


LIGHT SOURCE - FUENTE DE LUZ



1 x GU10 MAX 8W LED no incl

lamholder for GU10 incl


TECHNICAL FEATURES - CARACTERISTICAS TÉCNICAS



LOREFAR, SL
Dinámica, nº1 • Polígono Industrial Santa Rita • 08755
Castellbisbal • Barcelona • Spain
NAC: Tel. 902 165 166 • EXP: Tel. +34 937 723 965
faro@lorefar.com • www.faro.es

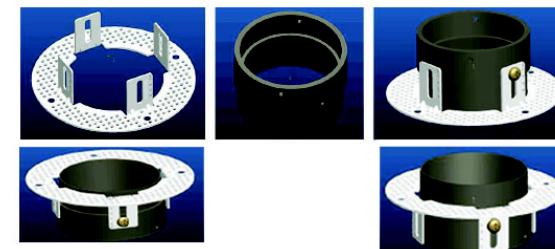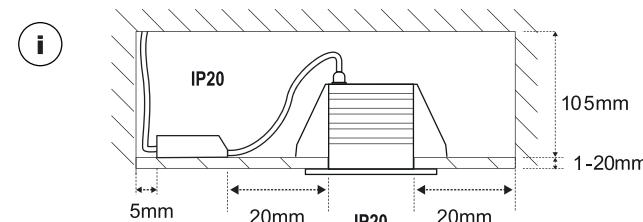


Adjust according to the ceiling, so the plaster could be 1 mm to 20mm.
Adáptese según el techo, entonces el yeso podrá ser 1 mm a 20mm.

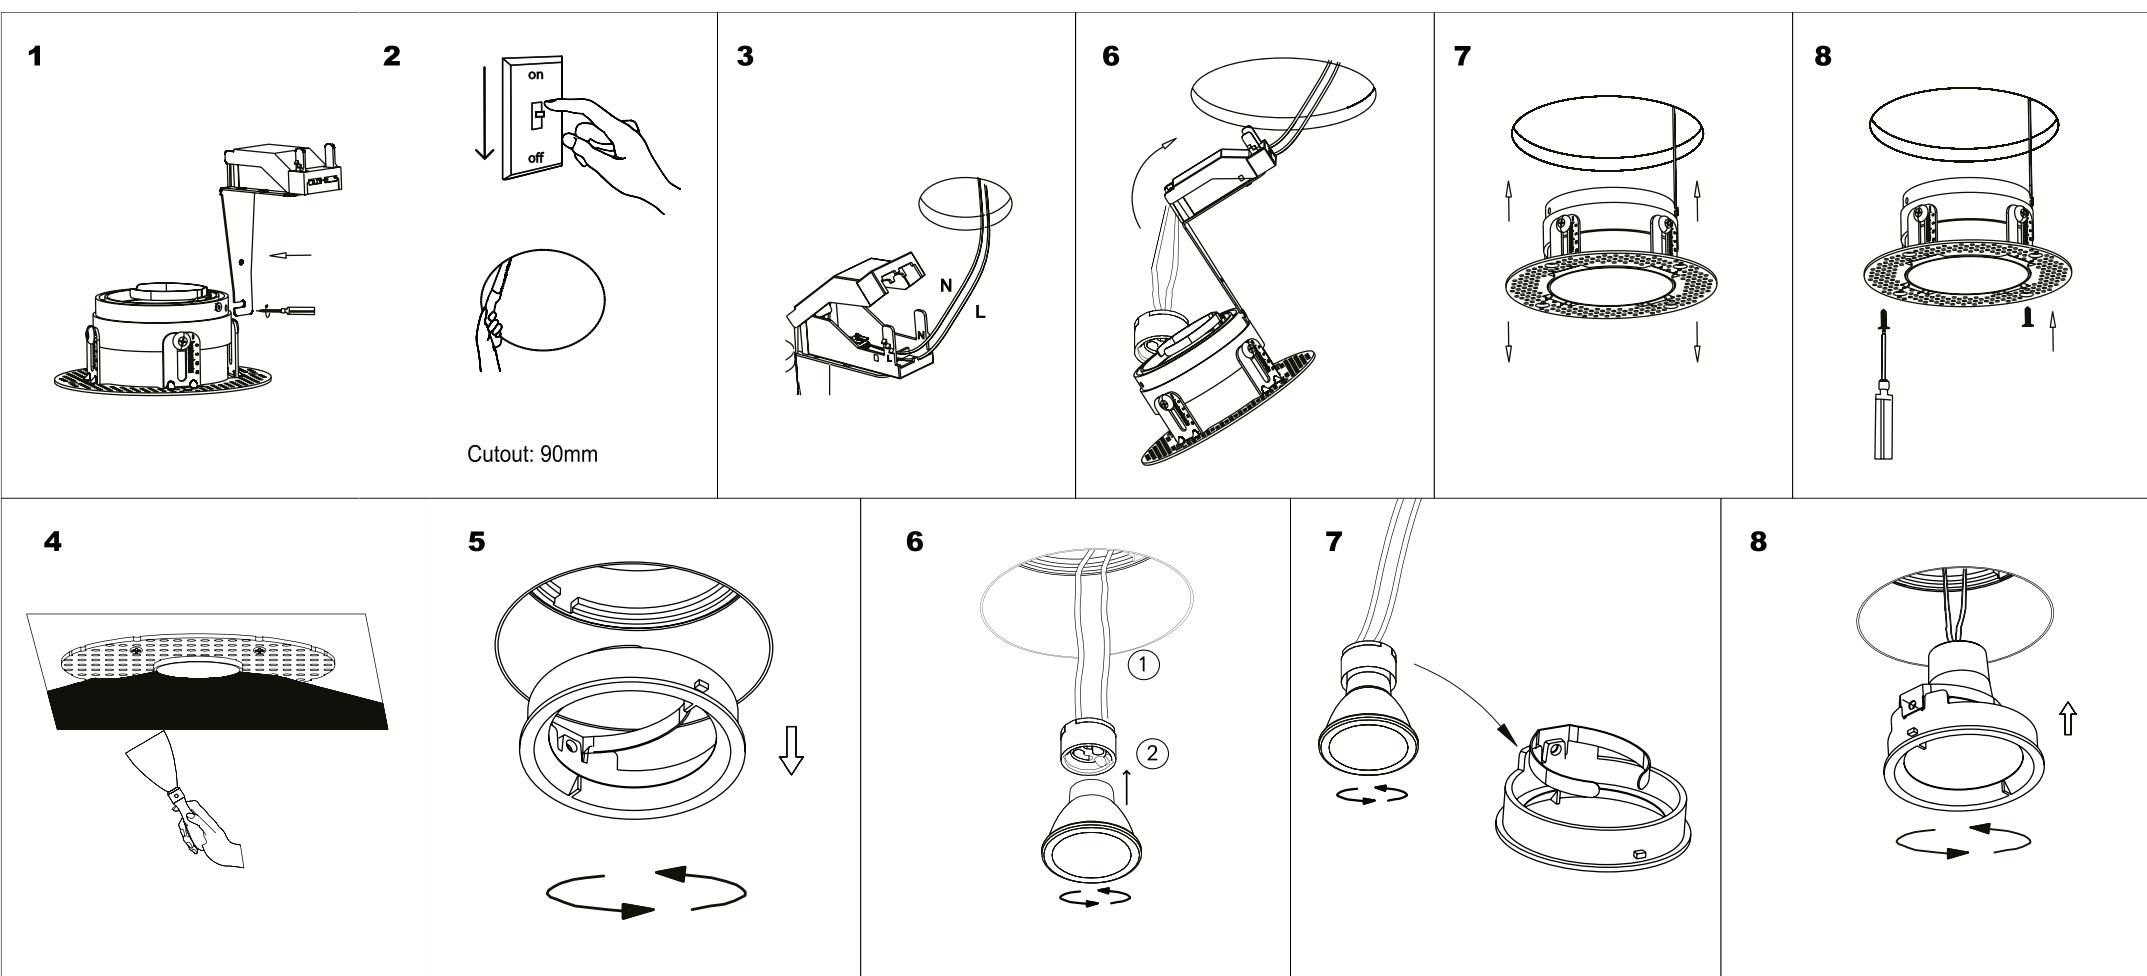

LIGHT SOURCE - FUENTE DE LUZ


1xGU10 MAX 8W LED no included
Lamp holder GU10 included

TECHNICAL FEATURES - CARACTERISTICAS TÉCNICAS




LOREFAR, SL • Dinámica, nº1 • Polígono Industrial • Santa Rita
08755 Castellbisbal • Barcelona • Spain
faro@lorefar.com • www.faro.es


i

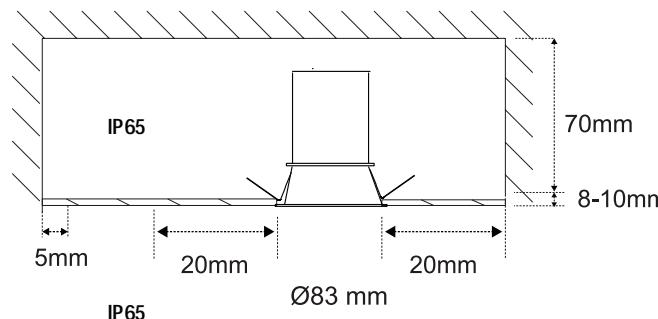


1




2

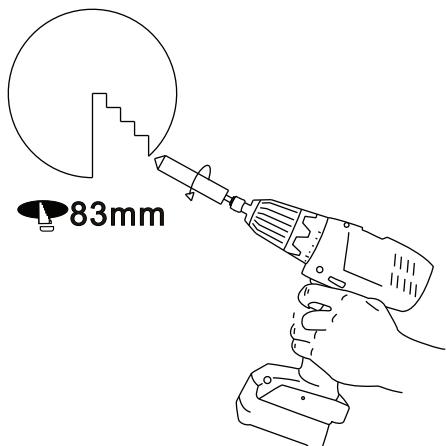


3

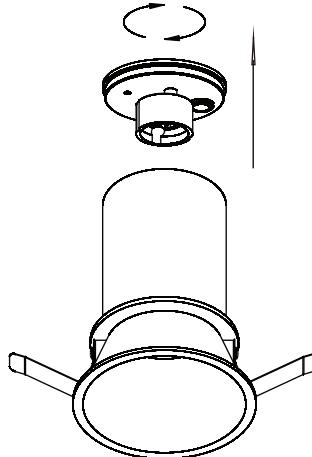

4

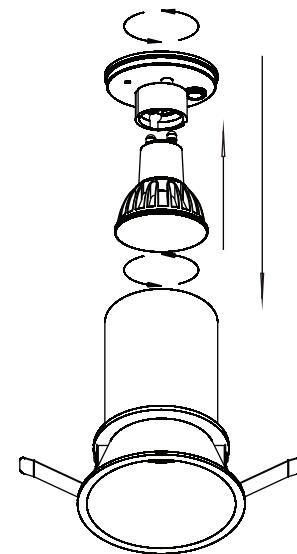

5

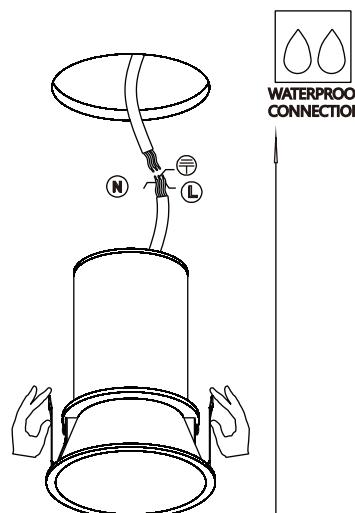

6



LIGHT SOURCE - FUENTE DE LUZ

1 x GU10 max 8W LED

TECHNICAL FEATURES - CARACTERISTICAS TÉCNICAS

