



Aim

Designed by Ronan & Erwan Bouroullec, 2013




16W - 895lm - 2700K

Suspended light fitting. Body in varnished aluminium sheet, shade in photo-etched optical polycarbonate. Internal reflector in photo-etched ABS. Orientable body. Powered directly from mains. The LED can be dimmed with a «Triac for Led» dimmer approved by Flos.Flos does not respond in case of wrong electrical connection system installations. The cable has a useful length of 9 meters and thus the lamp can be suspended 3 meters from the ceiling. Multiple rose with capacity to connect up to 5 Aims also available.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



Main specifications

EAN	8059607013267
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	16
System flux (lm)	895

Physical

Colour	White
Cord length (mm)	9000
Net weight (kg)	3.2
Package height (mm)	375
Package width (mm)	300
Package length (mm)	300
Package volume (m3)	0.03
IP internal	20

Download

Mounting instructions	业 PDF
Compatible dimmers	业 PDF
Spare Parts	↓ PDF

Photometric Files

LDT / IES



Technical Drawings

2D	<u>↓</u> ZIP
3D	<u>↓</u> ZIP
∂ Bim	⊥ ZIP

















https://professional.flos.com/en/global/product/aim-f0090009/

F0090009

Schematic light drawing



Luminous flux luminaire

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only) light source by a professional

Photometric

Lighting type	Direct
Light distribution	Roto symmetric
CCT (K)	2700

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimmable	Yes
Dimming type	Mains Cut Dimming
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No
Charging min time	No


Accessories & Power Supply



https://professional.flos.com/en/global/product/aim-f0090009/

F0090009

Spare Parts

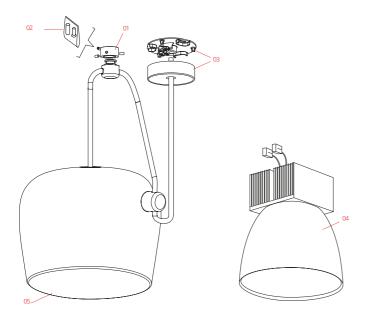

O1. Ceiling attachment assembly RF0090109
O2. Kit of quantity 3 m4 screws RF06749
O3. White ceiling rose assembly RF0090209
O5. Aim opal diffuser RF0090600

DOWNLOAD









RF0090109

Ceiling attachment assembly

RF06749

Kit of quantity 3 m4 screws

RF0090209

White ceiling rose assembly

F0090600

Aim opal diffuser