


Discovery Vertical 100 White Violet Integralis - Black - App Compatible

Ernesto Gismondi



IP20  Regulable: 

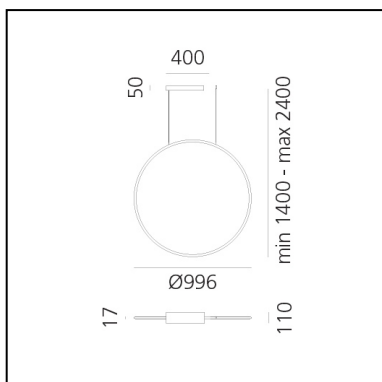

LUMINARIA

DAY MODE

- Potencia (W): **60W**
- Tensión de alimentación: **220V - 240V**
- Flujo Luminoso (lm): **2646lm**
- Flujo Radiante: **1606mW**
- CCT: **3500K**
- Efficacy: **44lm/W**
- CRI: **80**
- Dimmable Typology: **APP**

NIGHT MODE

- Power Supply: **220V - 240V**
- Potencia (W): **60W**
- Flujo Luminoso (lm): **27lm**
- Flujo Radiante: **4866mW**

ESPECIFICACIONES

Discovery is an unobtrusive, utterly absent and immaterial element. Its volume is only perceived when switched on, thanks to the light that outlines the central emitting surface. The result is a uniform light, ideal for working environments. The company's great optoelectronic skills, combined with a thorough culture of design and with technological know-how, produces a perfectly all-purpose and surprising solution, which translates innovation into emotional perception. In the version WHITE-VIOLET INTEGRALIS, Artemide App compatible, Discovery is designed in two operating modes: Day, with white light performance for a microbial growth control, and Night, with a violet light emission for a faster reduction of the bacterial load, in particular for photosensitive pathogenic bacteria.

CÓDIGO PRODUCTO: 1993230IN1APP

CARACTERÍSTICAS

- Código del artículo: **1993230IN1APP**
- Color: **Black**
- Instalación: **Suspensión**
- Material: **Technopolymer, aluminium**
- Serie: **Design Collection**
- Entorno de uso: **Interior**
- diseño: **Ernesto Gismondi**

DIMENSIONES

- Ancho: **cm 1.7**
- Diámetro: **cm 99.6**
- Longitud base: **cm 40**
- Altura máxima del techo: **cm 240**

FUENTES DE LUZ INCLUIDAS

- Categoría: **Dual Channel LED**
- Numero: **1**
- CRI: **80**
- Color Tolerance: **3SDCM**
- Service Life Canal 1: **L70 B50 60000h**
- Service Life Canal 2: **L70 B50 20000h**

- Dimmable Typology: **APP**

ACCESORIOS



Device for switching and controlling Artemide App products. Max N.3 inputs for external push buttons. Mains power supply required. To be installed inside flush mounting boxes or junction boxes. DV1080APP